

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 September 2005 (15.09.2005)


PCT

(10) International Publication Number  
**WO 2005/086064 A2**

- (51) International Patent Classification<sup>7</sup>: **G06F 19/00** (74) Agents: TSUGARU, Susumu et al.; c/o Philips Japan, Ltd., Philips Bldg., 2-13-37, Kohnan, Minato-ku, Tokyo 108-8507 (JP).
- (21) International Application Number: PCT/IB2005/050729
- (22) International Filing Date: 1 March 2005 (01.03.2005) (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2004-058749 3 March 2004 (03.03.2004) JP
- (71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): KURODA, Yasuhiro [JP/JP]; c/o Philips Japan, Ltd., Philips Bldg., 2-13-37, Kohnan, Minato-ku, Tokyo 108-8507 (JP). OKAHISA, Toshiya [JP/JP]; c/o Philips Japan, Ltd., Philips Bldg., 2-13-37, Kohnan, Minato-ku, Tokyo 108-8507 (JP). OHNISHI, Yoshiaki [JP/JP]; c/o Philips Japan, Ltd., Philips Bldg., 2-13-37, Kohnan, Minato-ku, Tokyo 108-8507 (JP).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DRUG ADMINISTRATION SUPPORT SYSTEM

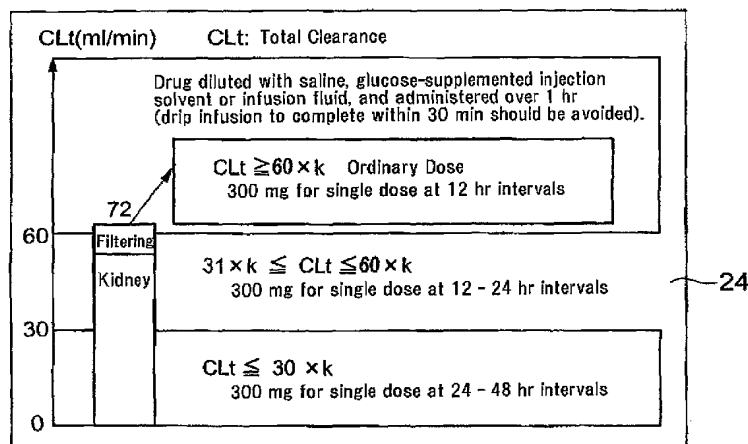

(57) Abstract: The total clearance of a drug is calculated based on the blood filtering information, biological information and drug information. The total clearance is displayed on a drug administration support screen (24). The drug administration support screen (24) provides a guideline of the dose of a drug which varies dependent on the level of the renal creatinine clearance. Specifically, the renal clearance of the drug and the clearance of the drug due to continual hemofiltration (CHF) are shown in a graphical form, and a guideline of the dose of the drug is provided which varies dependent on the level of the total clearance. Accordingly, the user can easily recognize the meaning of the guideline by referring to the total clearance of the drug shown in the graph. The drug administration support display screen (24) also provides additional information necessary for drug administration as appropriate.



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*